

SILVER

Tecnologia LED
LED technology

SILVER

tecnologia LED
LED technology

60W

IP65



Illuminazione
LED
LED
Lighting






Barra LED Monocromatica o RGB, adatta per uso interno ed esterno



Monochrome or RGB LED bar, suitable for indoor and outdoor use

SILVER

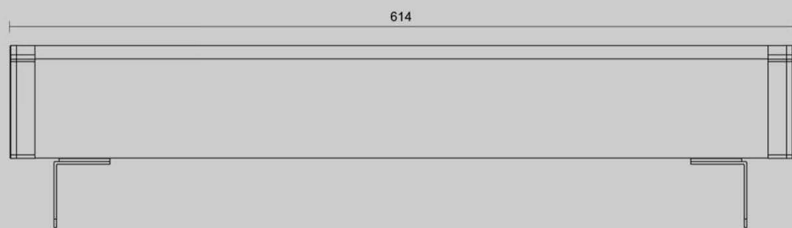

SILVER

tecnologia LED



Specifiche versione Monocromatica

Vin: 90 ÷ 264 VAC
P at 600 mm: 35W
P at 900 mm: 55W
P at 1200 mm: 70W
Raggio temperatura: -15 ÷ +50° C
Classe di isolamento: 1

Housing

Alluminio anodizzato
Vetro temperato
Classe di Protezione: IP65
Staffa in acciaio INOX

Ottica e LED

600 mm: 24 LEDs
900 mm: 36 LEDs
1200 mm: 48 LEDs
Flusso minimo dei LED: 114lm at 350 mA
(for white model)
P led: 1,2W
Apertura lente: stretta - media- larga- ellittica
Raggio di temperatura colore: 2700K-6000K
(on request)

Cablaggio

Tipo Y standard, lunghezza 1,5 m

Specifiche versione RGB

Vin: 90 ÷ 264 VAC
P at 600 mm: 35W
P at 900 mm: 55W
P at 1200 mm: 70W
Raggio temperatura: -15 ÷ +50° C
Classe di isolamento: 1

Housing

Alluminio anodizzato
Vetro temperato
Classe di Protezione: IP65
Stainless steel bracket

Ottiche e LED

600 mm: 24 LEDs
900 mm: 36 LEDs
1200 mm: 48 LEDs
P led: 1,2W
Apertura lente: stretta - media- larga- ellittica

Controllo

Protocollo DMX512

Cablaggio

Tipo Y standard, lunghezza 1,5 m

SILVER

LED technology



Specific version Monochrome

Vin: 90 to 264 VAC

P at 600 mm: 35W

P at 900 mm: 55W

P at 1200 mm: 70W

Temperature range: -15 to + 50 ° C

Class: 1

Housing

anodized aluminum

Tempered glass

Protection Class: IP65

Bracket in stainless steel

Optics and LED

600 mm: 24 LEDs

900 mm: 36 LEDs

1200 mm: 48 LEDs

Minimum flow of LED: 114lm at 350mA

(for white model)

P LED: 1.2W

Lens Aperture: narrow - on average large-elliptical

Range of color temperature: 2700K-6000K

(on request)

Wiring

Type Y standard, lunghezza 1,5 m

Specific RGB version

Vin: 90 to 264 VAC

P at 600 mm: 35W

P at 900 mm: 55W

P at 1200 mm: 70W

Temperature range: -15 to + 50 ° C

Class: 1

Housing

anodized aluminum

Tempered glass

Protection Class: IP65

Stainless steel bracket

Optics and LED

600 mm: 24 LEDs

900 mm: 36 LEDs

1200 mm: 48 LEDs

P LED: 1.2W

Lens Aperture: narrow - on average large-elliptical

Control

DMX512

Wiring

Type Y standard, lunghezza 1,5 m